



**0.018(0.45) Test Centers G020 Series**

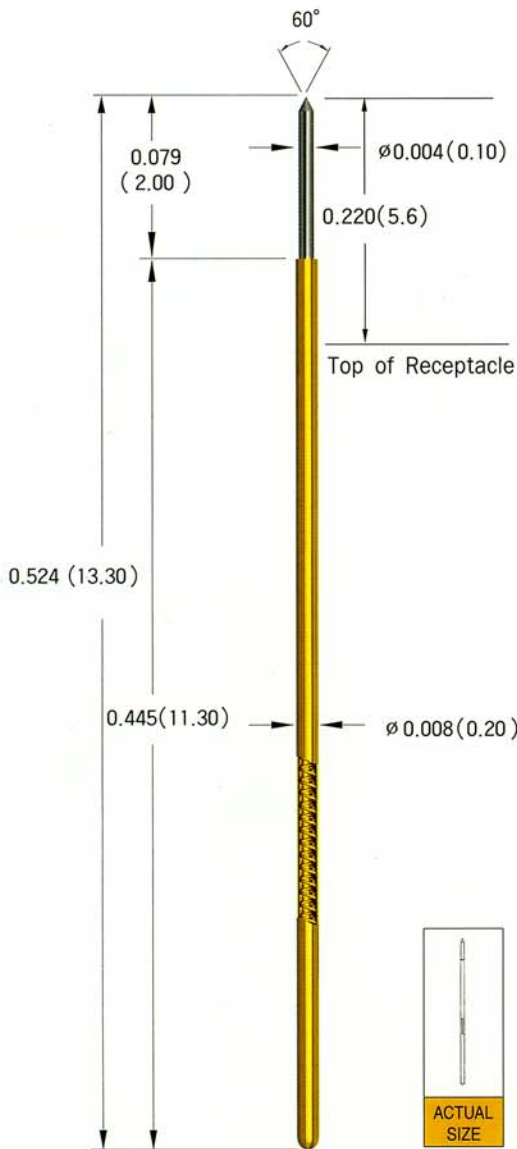

**Probe Specifications**

**Electrical(Static Conditions)**

Current Rating : 0.3 amps continuous  
 Probe Resistance : Less than 300 mΩ


**Materials and Finishes**

Plunger - Steel, rhodium plated over nickel  
 (optional gold plated over nickel)  
 Barrel - Phosphor bronze, gold plated  
 Spring - Music wire

Spring Force	± 30%	oz(grams)
Preload	Recommended Travel 0.028(0.7mm)	Full Travel 0.059(1.5mm)
0.155(4.4)	0.187(5.3)	0.219(6.2)

**Receptacle Specifications**

Housing : Phosphor bronze or Brass, gold plated  
 Mounting Hole Size : 0.014(0.35mm) drill is most commonly used

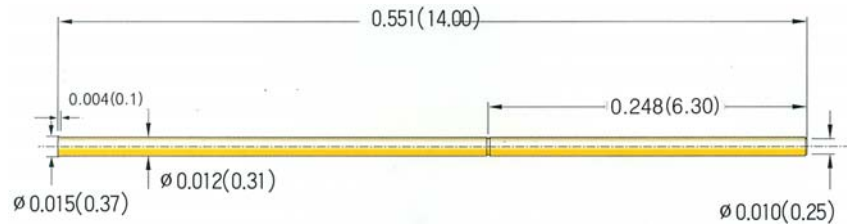

**G020SW**

Preattached Wire Receptacle

