



0.022(0.55) Test Centers G030 Series

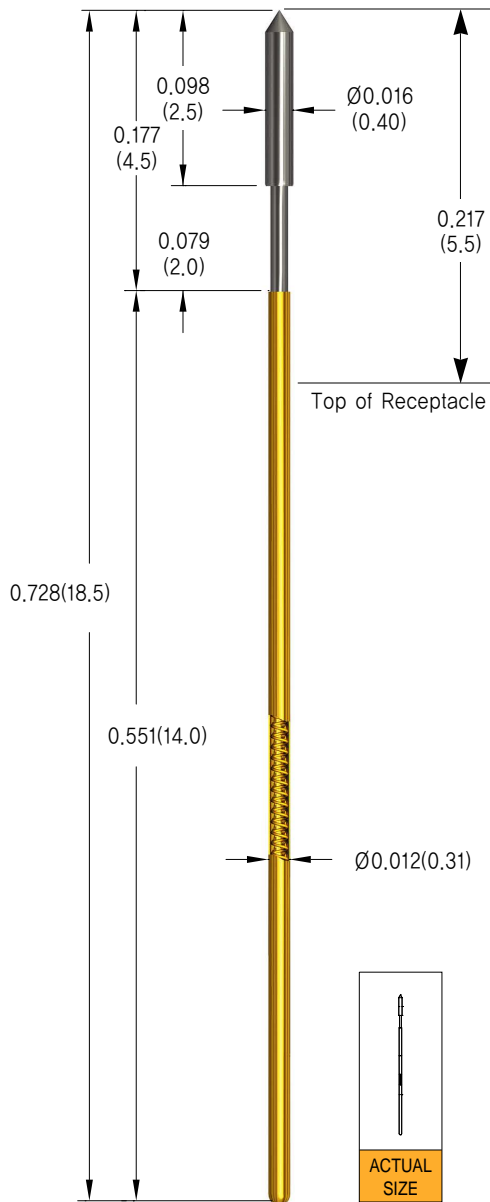

Probe Specifications

Electrical(Static Conditions)

Current Rating : 0.5 amps continuous
 Probe Resistance : Less than 150 m Ω


Materials and Finishes

Plunger - Steel, rhodium plated over nickel
 (optional gold plated over nickel)
 Barrel - Phosphor bronze, gold plated
 Spring - Music wire

Spring Force	± 30%	oz(grams)
Preload	Recommended Travel 0.059(1.5mm)	Full Travel 0.079(2.0mm)
0.370(10.5)	0.952(27)	1.129(32)

Receptacle Specifications

Housing : Phosphor bronze or Brass, gold plated
 Mounting Hole Size : 0.018(0.45mm) drill is most commonly used

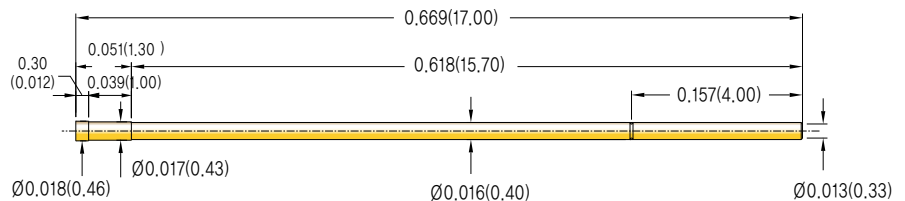

G030TW

No Termination Receptacle



G030SW

Preattached Wire Receptacle

