




# 0.025(0.65) Test Centers G040 Series

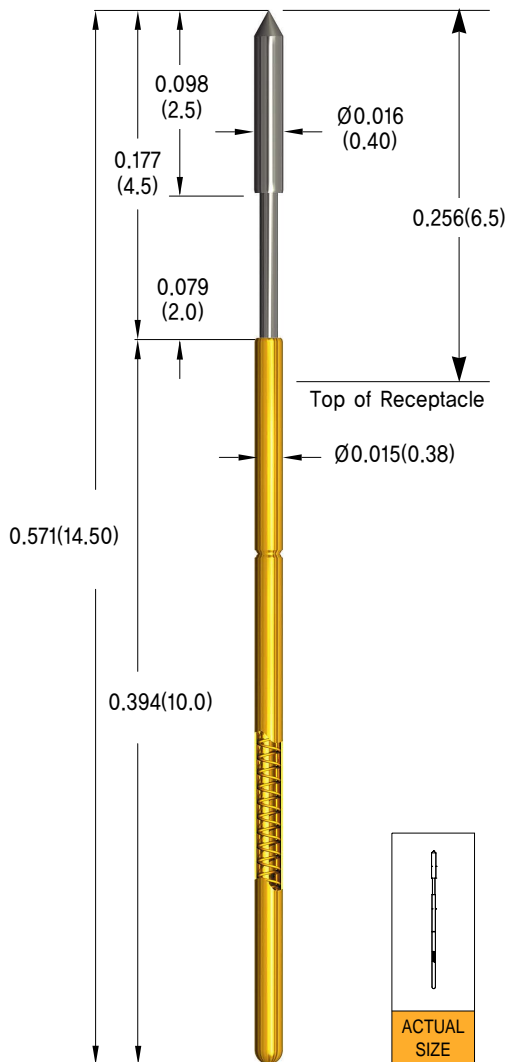

## Probe Specifications

### Electrical(Static Conditions)

Current Rating : 0.5 amps continuous  
 Probe Resistance : Less than 100 mΩ



### Materials and Finishes

Plunger - Steel, rhodium plated over nickel  
 (optional gold plated over nickel)  
 Barrel - Phosphor bronze, gold plated  
 Spring - Music wire

Spring Force	± 30%	oz(grams)
Preload	Recommended Travel 0.051(1.3mm)	Full Travel 0.071(1.8mm)
0.423(12)	1.376(39)	1.834(52)

## Receptacle Specifications

Housing : Phosphor bronze or Brass, gold plated  
 Mounting Hole Size : 0.022(0.55mm) drill is most commonly used

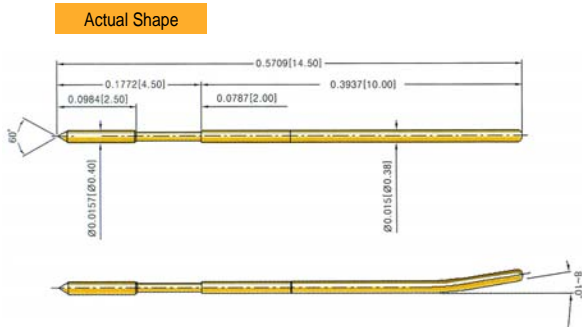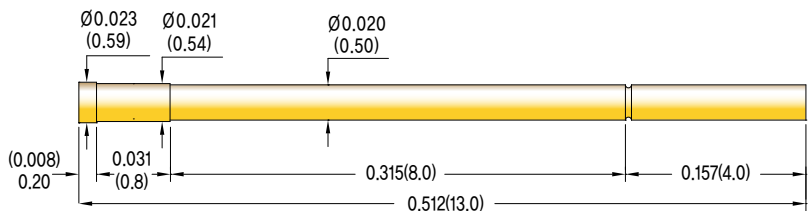

## G040TW

No Termination Receptacle



## G040SW

Preattached Wire Receptacle



Wire AWG 30