



0.030(0.80) Test Centers G042 Series

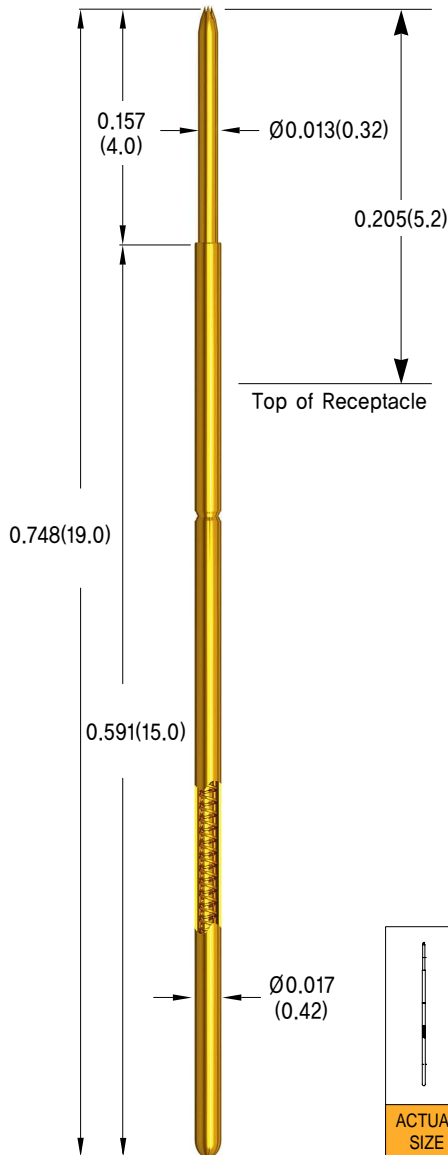

Probe Specifications

Electrical(Static Conditions)

Current Rating : 0.5 amps continuous
 Probe Resistance : Less than 100 mΩ


Materials and Finishes

Plunger - Steel, rhodium plated over nickel
 (optional gold plated over nickel)
 Barrel - Phosphor bronze, gold plated
 Spring - Music wire

Spring Force	± 30%	oz(grams)
Preload	Recommended Travel 0.051(1.3mm)	Full Travel 0.071(1.8mm)
0.882(25)	1.446(41)	1.693(48)

Receptacle Specifications

Housing : Phosphor bronze or Brass, gold plated
 Mounting Hole Size : 0.024(0.60mm) drill is most commonly used

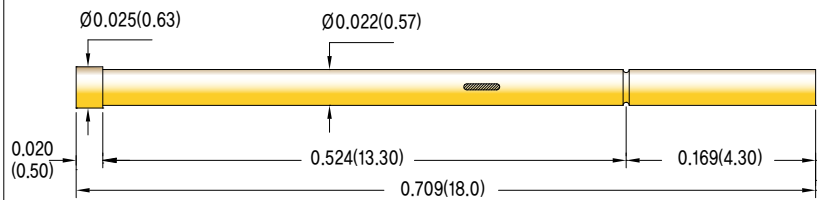

G042TW

No Termination Receptacle



G042SW

Preattached Wire Receptacle



Wire AWG 30