
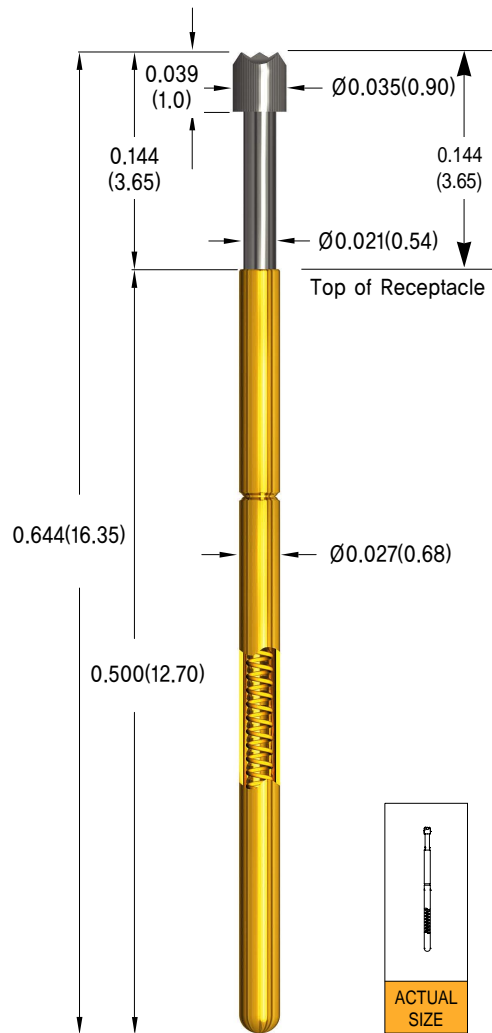


0.050(1.27) Test Centers G070 Series

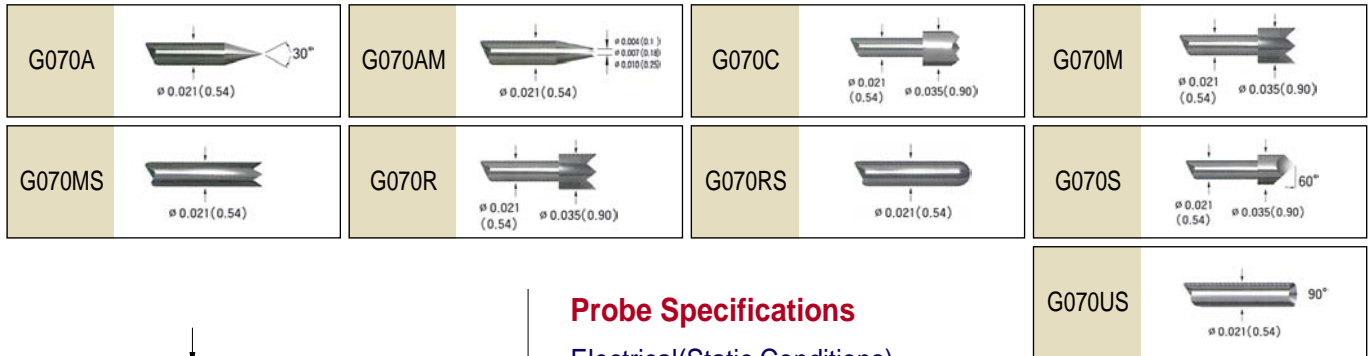

Probe Specifications

Electrical(Static Conditions)

Current Rating : 3 amps continuous
 Probe Resistance : Less than 50 mΩ


Materials and Finishes

Plunger - Full-hard beryllium copper, palladium plated over nickel
 (optional gold plated over nickel)
 Barrel - Phosphor bronze, gold plated
 Spring - Music wire

Spring Force	± 20%	oz(grams)
Preload	Recommended Travel 0.070(1.77mm)	Full Travel 0.104(2.65mm)
0.883(25)	2.471(70)	3.177(90)

Receptacle Specifications

Housing : Work hardened nickel silver or Phosphor bronze or Brass, gold plated
 Mounting Hole Size : 0.035(0.90mm) drill is most commonly used

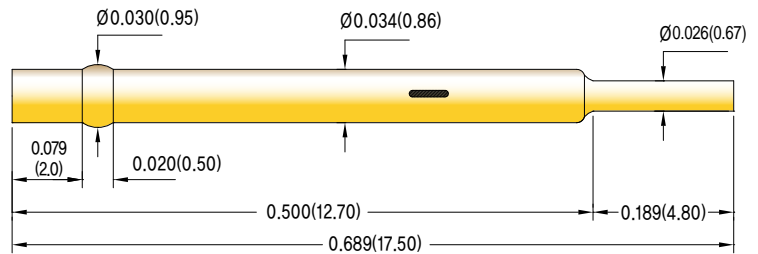

G070TW No Termination Receptacle



G070CW Preattached Wire Receptacle with Crimping



G070SW Preattached Wire Receptacle with Soldering

