

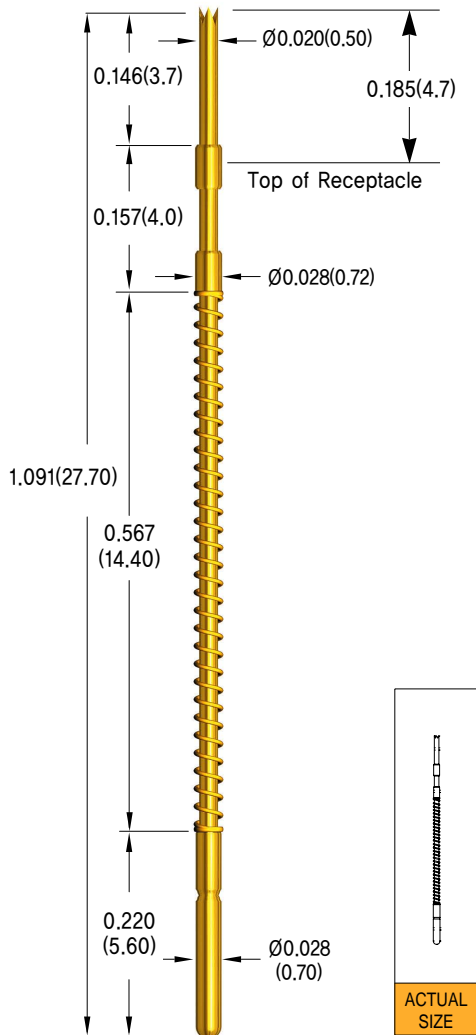


0.050(1.27) Test Centers GL070 Series

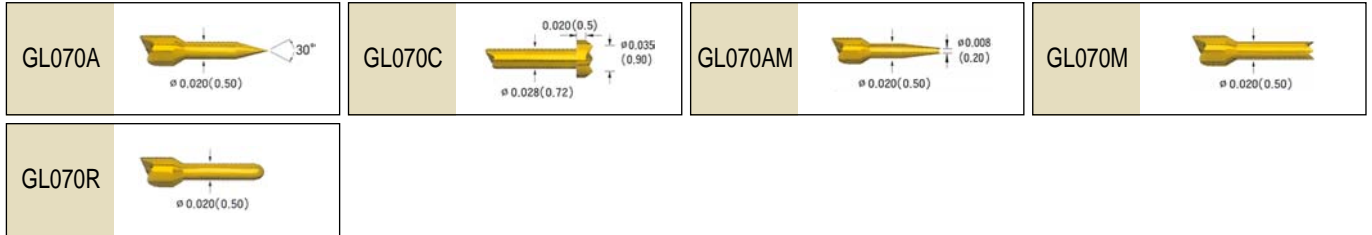

Probe Specifications

Electrical(Static Conditions)

Current Rating : 3 amps continuous
 Probe Resistance : Less than 50 mΩ


Materials and Finishes

Plunger - Full-hard beryllium copper, palladium plated over nickel
 (optional gold plated over nickel)
 Barrel - Nickel Silver, gold plated
 Spring - Music wire

| | | |
|--------------|--------------------|--------------|
| Spring Force | ± 20% | oz(grams) |
| Preload | Recommended Travel | Full Travel |
| | 0.118(3.0mm) | 0.169(4.3mm) |
| 3.527(100) | 6.914(196) | 8.642(245) |

Receptacle Specifications

Housing : Work hardened nickel silver or Phosphor bronze or Brass, gold plated
 Mounting Hole Size : 0.035(0.9mm) drill is most commonly used

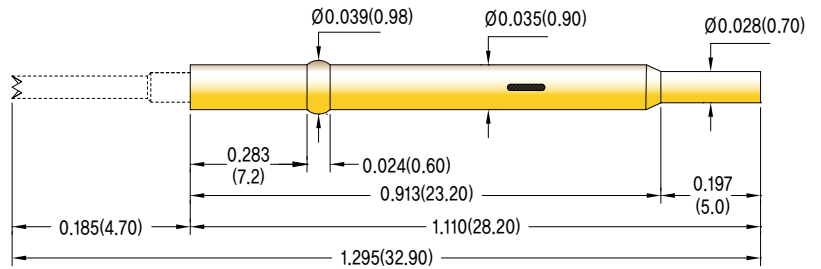

GL070TW Crimp Style Receptacle



GL070CW Preattached Wire Receptacle

