
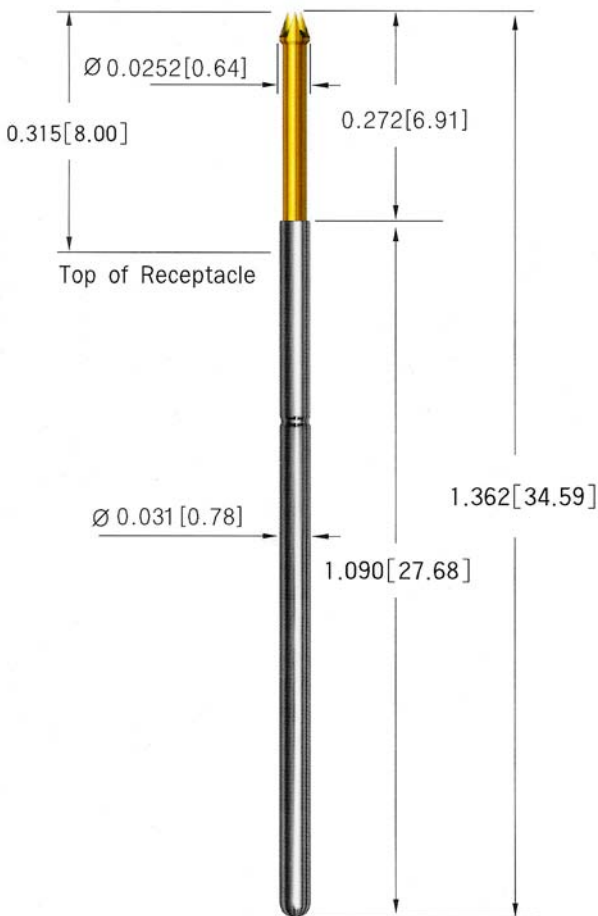



# 0.050 inch (1.27mm) TEST CENTERS

## LEENO PIN MODEL NO.



※ This probe to be used with DB-050 Double-ended receptacle

## Probe Specifications

### Electrical(Static Conditions)

Current Rating : 3 amps continuous  
 Probe Resistance : Less than 50 m $\Omega$


### Materials and Finishes

Plunger - Hardened Steel / Gold Plated  
 Barrel - Phosphor bronze / Nickel plated  
 Spring - Music wire / No Finish

Spring Force No.	Preload	Recommended Travel 0.1665inch 4.23mm	Full Travel 0.2500 inch 6.35mm
04	1.8oz.(52g)	4.3oz.(120g)	5.3oz.(150g)
06	1.8oz.(52g)	5.6oz.(160g)	7.6oz.(215g)

## RCT50TW

Crimp Style Receptacle      Mounting Hole Dia.  
 Material : Brass / Nickel Plated      0.038 / 0.039[0.965 / 0.991]

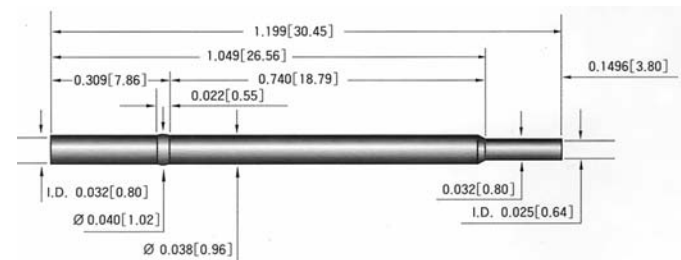

## RCT50W

Preattached Wire Receptacle      Wire : AWG30(LENGTH : ab. 800mm)  
 Material : Brass / Nickel Plated      Soldering

