
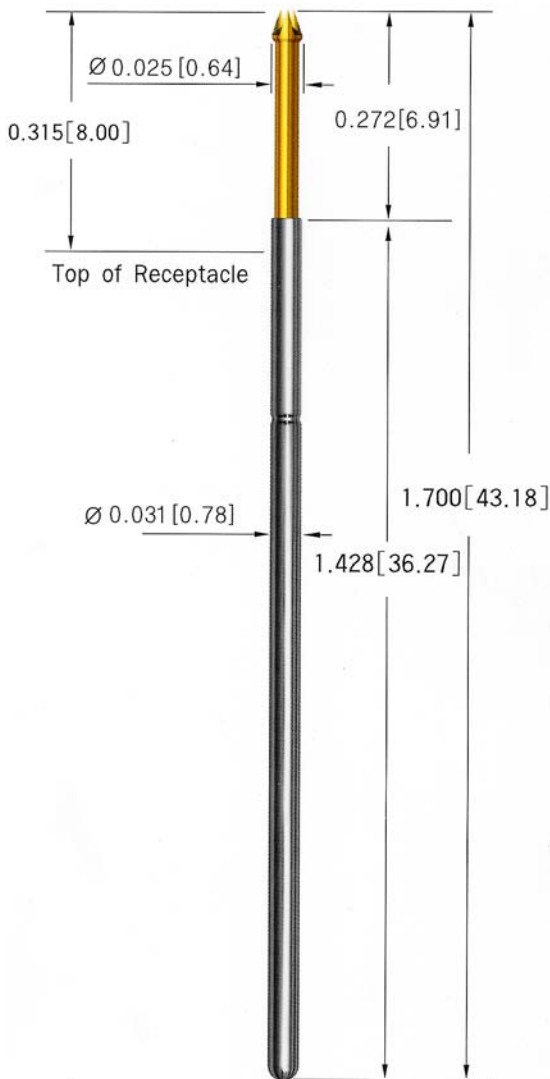



0.050 inch (1.27mm) TEST CENTERS

LEENO PIN MODEL NO.



※ This probe to be used with DB-050 Double-ended receptacle

Probe Specifications

Electrical(Static Conditions)

Current Rating : 3 amps continuous
 Probe Resistance : Less than 50 m Ω


Materials and Finishes

Plunger - Hardened Steel / Gold Plated
 Barrel - Phosphor bronze / Nickel plated
 Spring - Music wire / No Finish

Spring Force No.	Preload	Recommended Travel 0.1665inch 4.23mm	Full Travel 0.2500 inch 6.35mm
05	2.5oz.(65g)	5.0oz.(145g)	6.2oz.(175g)
07	3.1oz.(85g)	7.0oz.(195g)	8.7oz.(245g)

RCR50TW

Crimp Style Receptacle Mounting Hole Dia.
 Material : Brass / Nickel Plated 0.038 / 0.039[0.965 / 0.991]

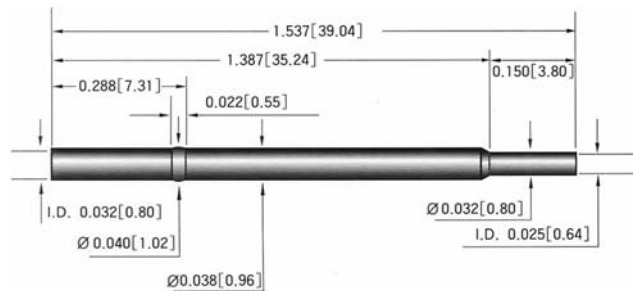

RCR50W

Preattached Wire Receptacle Wire : AWG30(LENGTH : ab. 800mm)
 Material : Brass / Nickel Plated Soldering

