
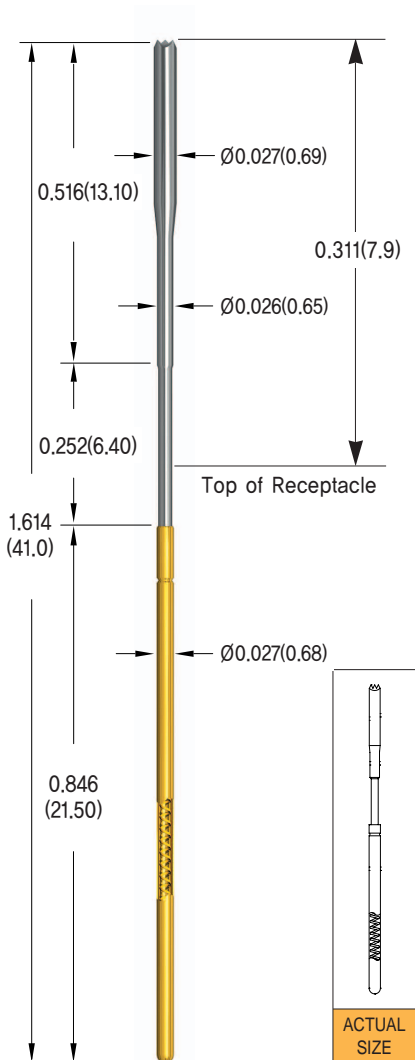


0.050(1.27) Test Centers G095 Series



Probe Specifications

Electrical(Static Conditions)

Current Rating : 3 amps continuous
 Probe Resistance : Less than 50 mΩ


Materials and Finishes

Plunger - Full-hard beryllium copper, palladium plated over nickel
 (optional gold plated over nickel)
 Barrel - Brass, gold plated
 Spring - Music wire

Spring Force	± 20%	oz(grams)
Preload	Recommended Travel 0.169(4.3mm)	Full Travel 0.252(64mm)
0.600(17)	2.753(78)	3.883(110)

Receptacle Specifications

Housing : Work hardened nickel silver or Phosphor bronze or Brass, gold plated
 Mounting Hole Size : 0.035(0.90mm) drill is most commonly used

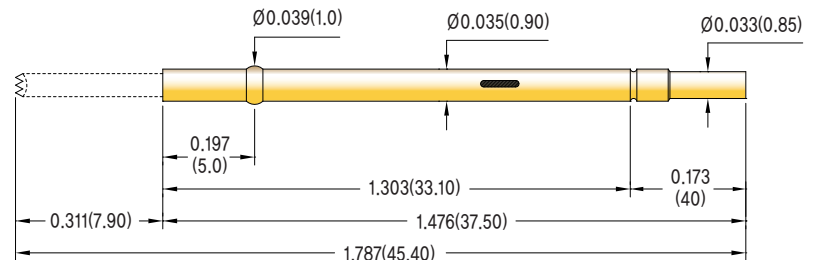

G095TW Crimp Style Receptacle



G095SW Preattached Wire Receptacle

