
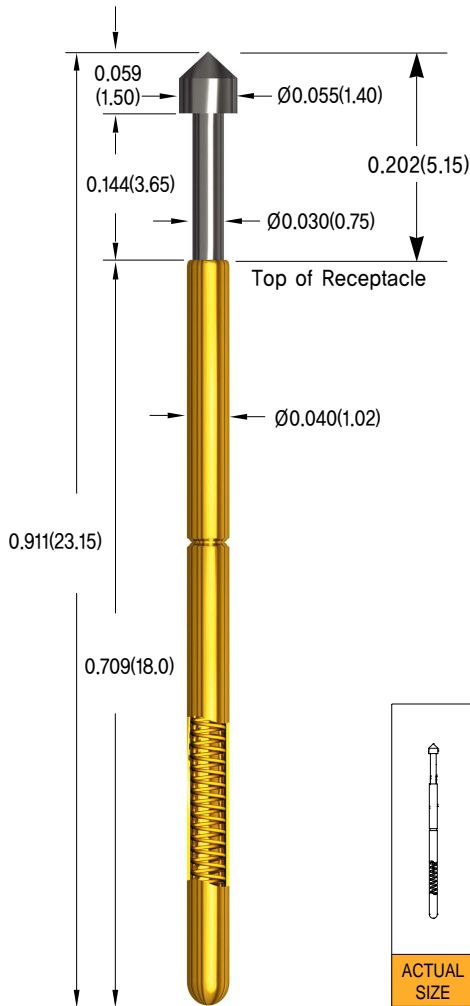


0.075(1.91) Test Centers GS105 Series

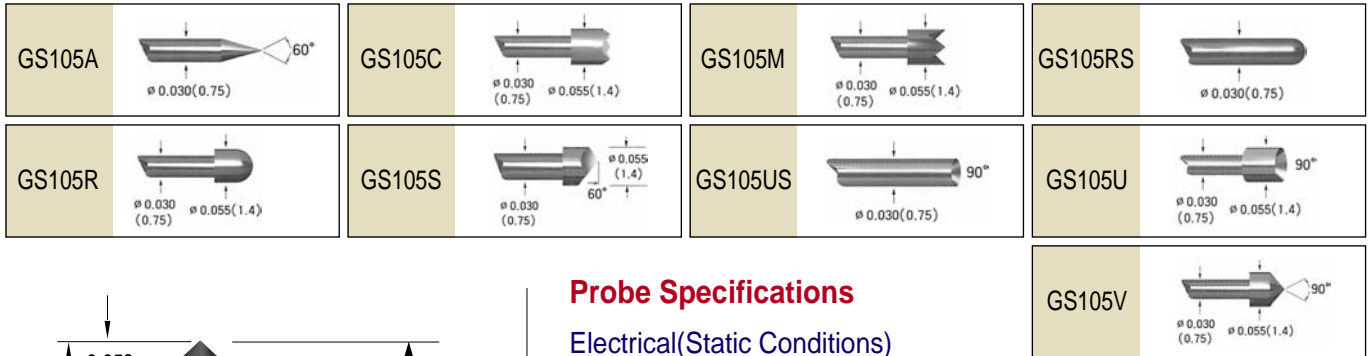

Probe Specifications

Electrical(Static Conditions)

Current Rating : 6 amps continuous
 Probe Resistance : Less than 30 mΩ


Materials and Finishes

Plunger - Full-hard beryllium copper, palladium plated over nickel
 (optional gold plated over nickel)
 Barrel - Brass, gold plated
 Spring - Music wire

Spring Force	± 20%	oz(grams)
Preload	Recommended Travel 0.094(2.4mm)	Full Travel 0.144(3.65mm)
1.589(45)	3.707(105)	4.589(130)

Receptacle Specifications

Housing : Work hardened nickel silver or Phosphor bronze or Brass, gold plated
 Square Post : Brass, gold plated
 Mounting Hole Size : 0.051(1.30mm) drill is most commonly used

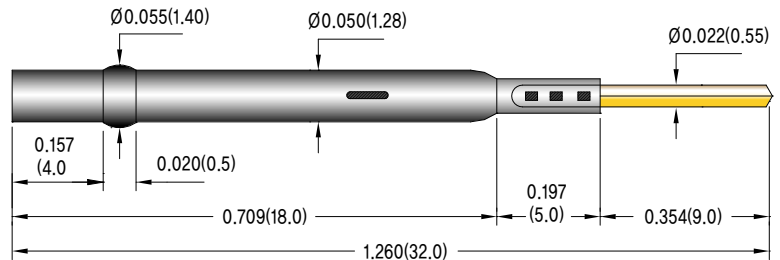

GS105W Wire-Wrap Receptacle



GS105SW Solder Cup Receptacle



GS105TW Crimp Style Receptacle

