
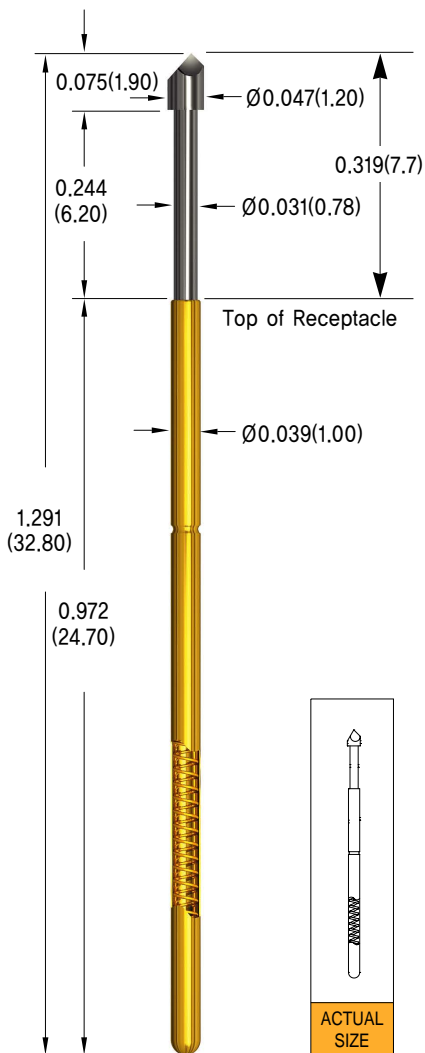


0.075(1.91) Test Centers G1003 Series

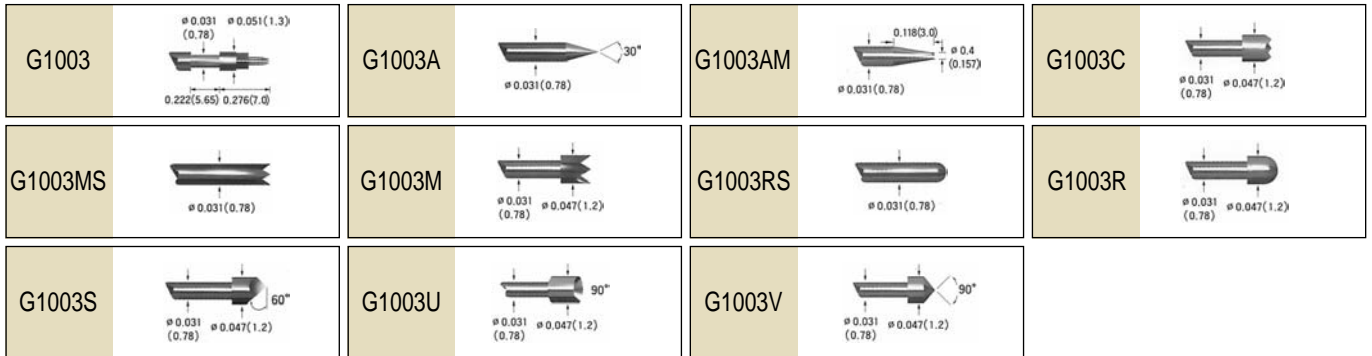

Probe Specifications

Electrical(Static Conditions)

Current Rating : 6 amps continuous
 Probe Resistance : Less than 30 mΩ

Materials and Finishes

Plunger - Full-hard beryllium copper, palladium plated over nickel
 (optional gold plated over nickel)
 Barrel - Phosphor bronze, gold plated
 Spring - Music wire

Spring Force	± 20%	oz(grams)
Preload	Recommended Travel 0.161(4.1mm)	Full Travel 0.244(6.2mm)
1.765(50)	3.707(105)	4.942(140)

Receptacle Specifications

Housing : Work hardened nickel silver or Phosphor bronze or Brass, nickel plated
 Square Post : Brass, gold plated
 Mounting Hole Size : 0.051(1.30mm) drill is most commonly used

