
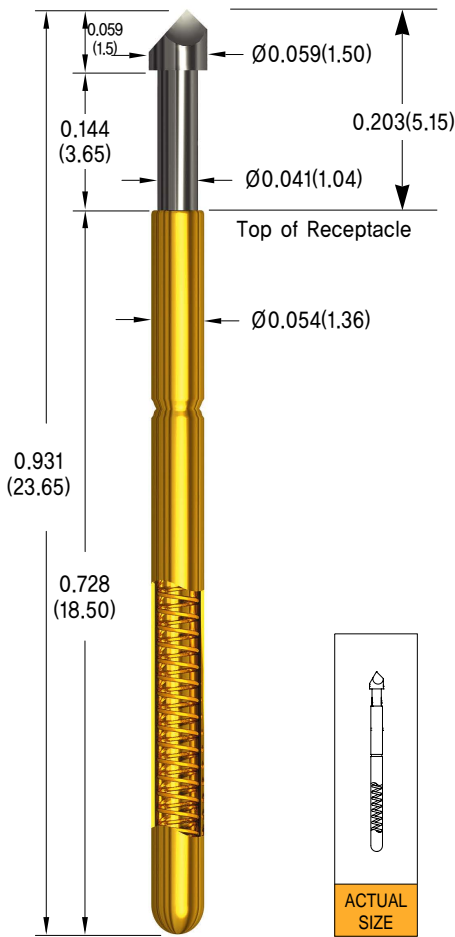


# 0.100(2.54) Test Centers GSS135 Series

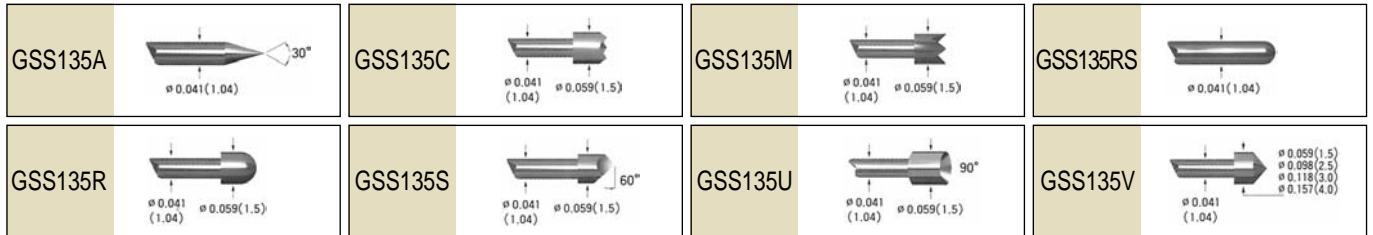

## Probe Specifications

### Electrical(Static Conditions)

Current Rating : 6 amps continuous  
 Probe Resistance : Less than 30 mΩ

### Materials and Finishes

Plunger - Full-hard beryllium copper, palladium plated over nickel  
 (optional gold plated over nickel)  
 Barrel - Brass, gold plated  
 Spring - Music wire

Spring Force	± 20%	oz(grams)
Preload	Recommended Travel 0.094(2.4mm)	Full Travel 0.144(3.65mm)
1.412(40)	2.118(60)	2.471(70)
2.824(80)	3.707(105)	4.236(120)

## Receptacle Specifications

Housing : Work hardened nickel silver or Phosphor bronze or Brass, gold plated  
 Square Post : Brass, gold plated  
 Mounting Hole Size : 0.051(1.30mm) drill is most commonly used

