
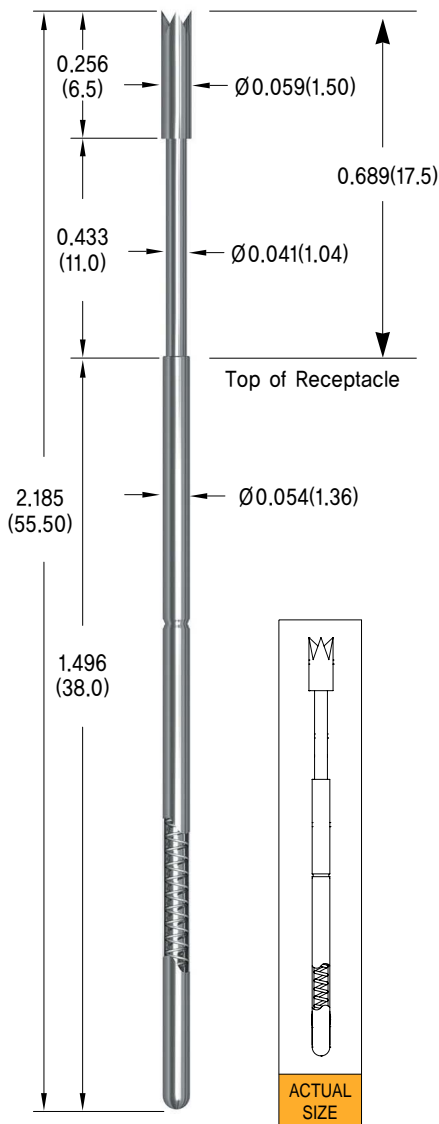


0.100(2.54) Test Centers GL1353 Series

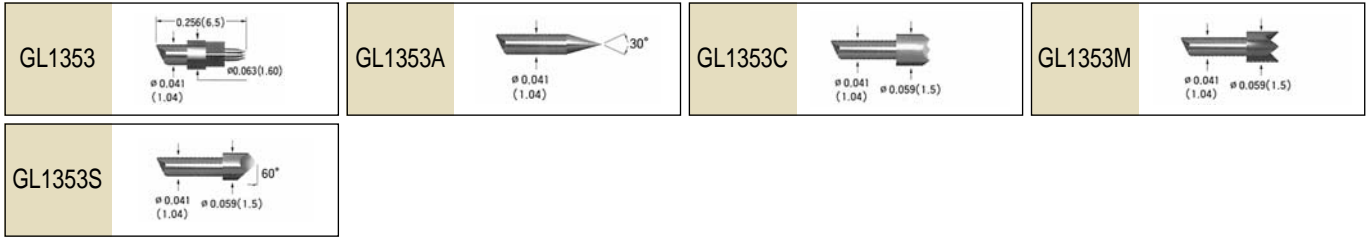

Probe Specifications

Electrical(Static Conditions)

Current Rating : 6 amps continuous
 Probe Resistance : Less than 30 mΩ


Materials and Finishes

Plunger - Full-hard beryllium copper, palladium plated over nickel
 (optional gold plated over nickel)
 Barrel - Brass, gold plated
 Spring - Music wire

Spring Force	± 20%	oz(grams)
Preload	Recommended Travel 7.3mm	Full Travel 11.0mm
2.083(59)	6.213(176)	8.296(235)

Receptacle Specifications

Housing : Brass, gold plated
 Square Post : Brass, gold plated
 Mounting Hole Size : 0.067(1.70mm) drill is most commonly used

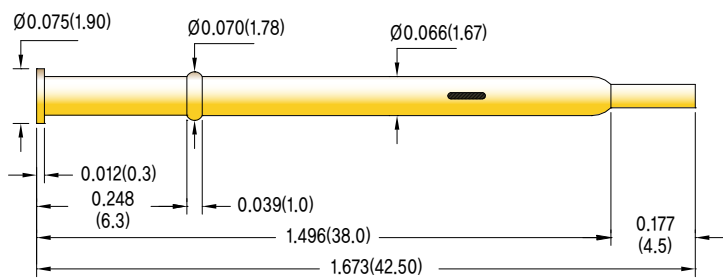

GL1353W Wire-Wrap Receptacle

