

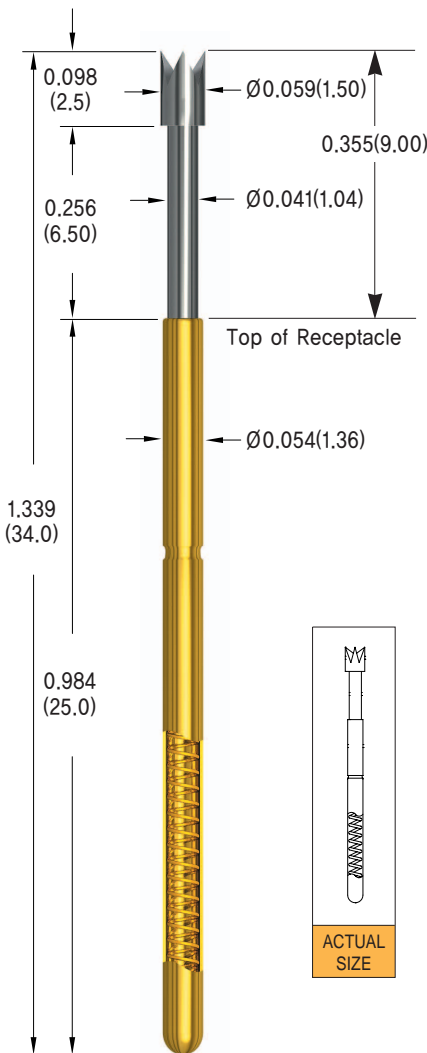



0.100(2.54) Test Centers G135 Series

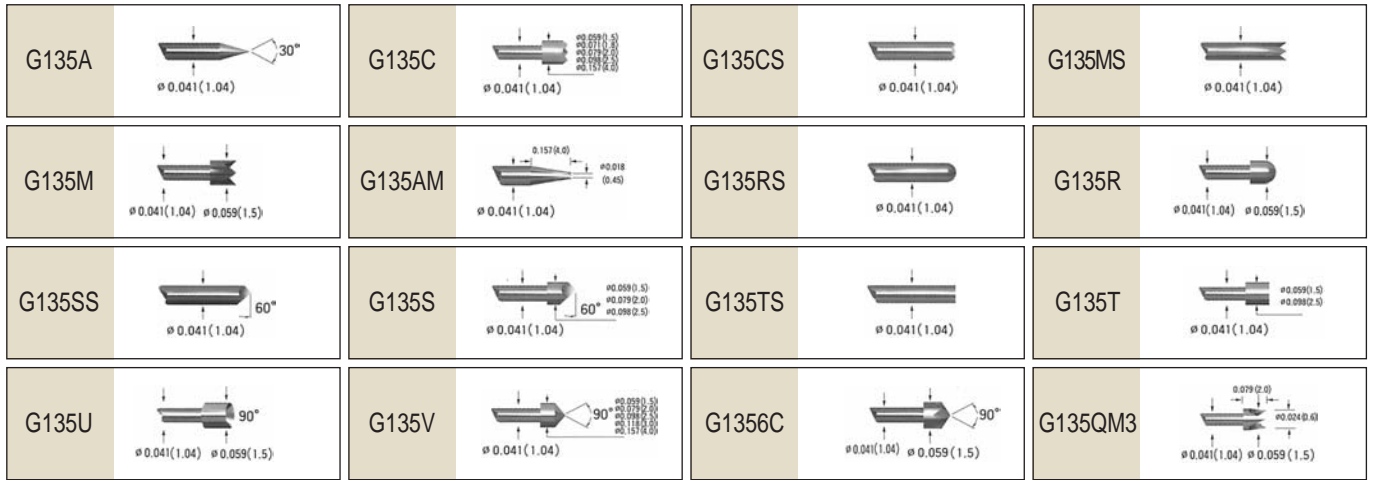

Probe Specifications

Electrical(Static Conditions)

Current Rating : 6 amps continuous
 Probe Resistance : Less than 30 mΩ

Materials and Finishes

Plunger - Full-hard beryllium copper, palladium plated over nickel
 (optional gold plated over nickel)

Barrel - Phosphor bronze, gold plated

Spring - Music wire

Spring Force	± 20%	oz(grams)
Preload	Recommended Travel 0.094(2.4mm)	Full Travel 0.144(3.65mm)
1.589(45mm)	5.119(145)	6.884 Ctype only(195)
1.765(50mm)	6.001(170)	8.119(230)

Receptacle Specifications

Housing : Work hardened nickel silver or Phosphor bronze or Brass, nickel plated

Square Post : Brass, gold plated

Mounting Hole Size : 0.067(1.7mm) drill is most commonly used

