
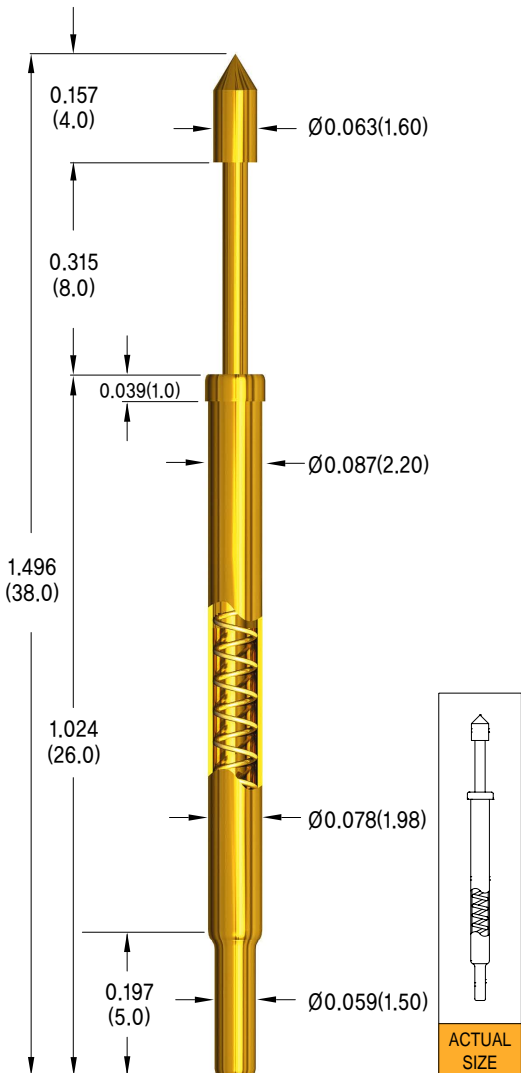


**0.125(3.18) Test Centers G200 Series**

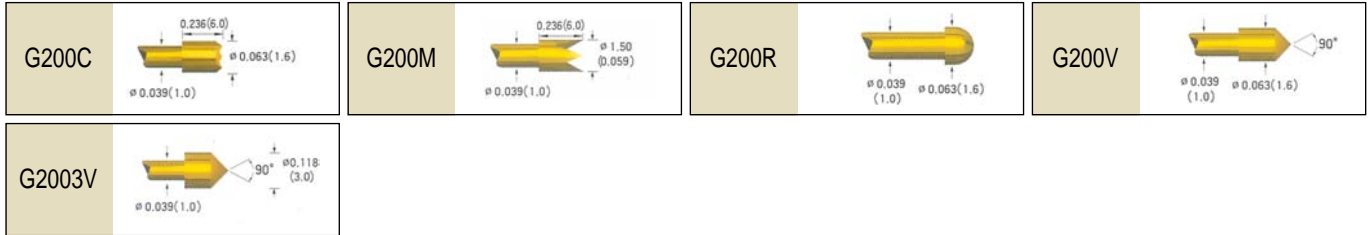

**Probe Specifications**

**Electrical(Static Conditions)**

Current Rating : 8 amps continuous  
 Probe Resistance : Less than 30 m $\Omega$

**Materials and Finishes**

Plunger - Full-hard beryllium copper, gold plated over nickel  
 (optional rhodium plated over nickel)  
 Barrel - Brass, Nickel plated  
 Spring - Music wire  
 Mounting Hole Size : 0.079(2.0mm) drill is most commonly used

Spring Force	$\pm 20\%$	oz(grams)
Preload	Recommended Travel 0.029(5.3mm)	Full Travel 0.315(8.0mm)
0.530(15)	5.578(158)	8.578(243)