


**DB011AA / DB015AA**

• **DB011AA**

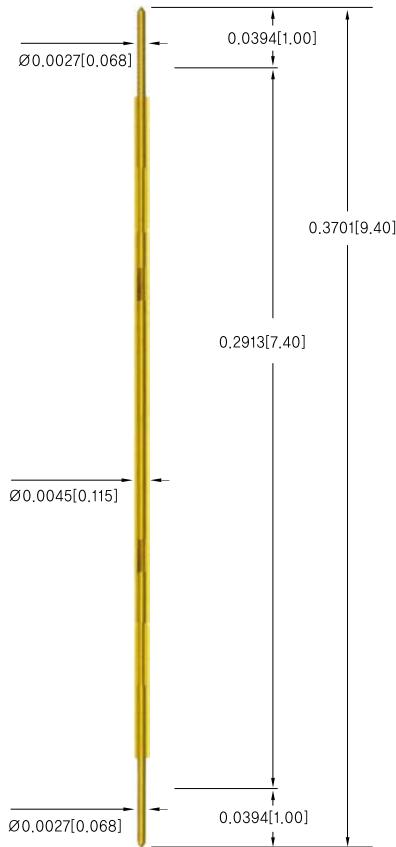

: On development


▪ **Mechanical Spec.**

Spring Force : .16oz (4.6g) @ .0236 (0.60mm)  
 Recommended travel : .0236 (0.60mm)  
 Full travel : .0394 (1.00mm)  
 Material : Plunger - SK4 / Au plated  
 Barrel - Phosphor bronze / Au plated  
 Spring - Music wire / Au plated

▪ **Electrical Spec.**

Current Rating - 0.1A Continuous  
 Probe Resistance - Less than 2.0 ohm

• **DB015AA**

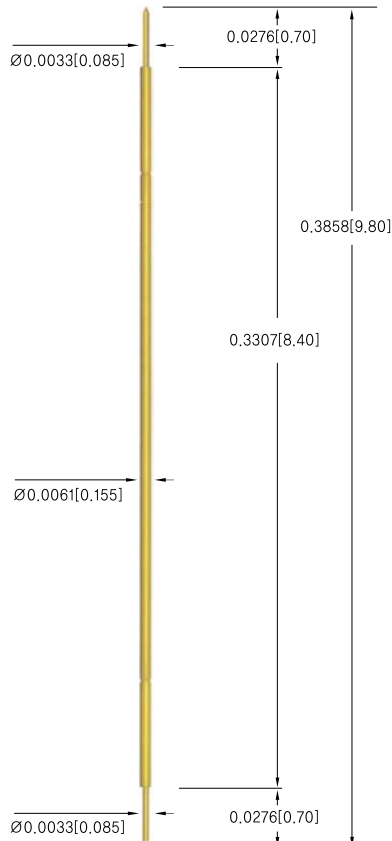

▪ **Mechanical Spec.**


Spring Force : .18oz (5.2g) @ .0276 (0.70mm)  
 Recommended travel : .0236 (0.70mm)  
 Full travel : .0423 (1.10mm)  
 Material : Plunger - SK4 / Au plated  
 Barrel - Phosphor bronze / Au plated  
 Spring - Music wire / Au plated

▪ **Electrical Spec.**

Current Rating - 0.1A Continuous  
 Probe Resistance - Less than 2.0 ohm

**Applications**

Vertical Probe Card  
 LCD test block  
 fine-pitch PCB & F-PCB  
 TAB, TCP, COG test etc..



- All specifications subject to change without notice.
- All dimensions are in inches[mm].
- All spring forces in ounces[grams].