


DB335AA / DB440CC

• DB335AA

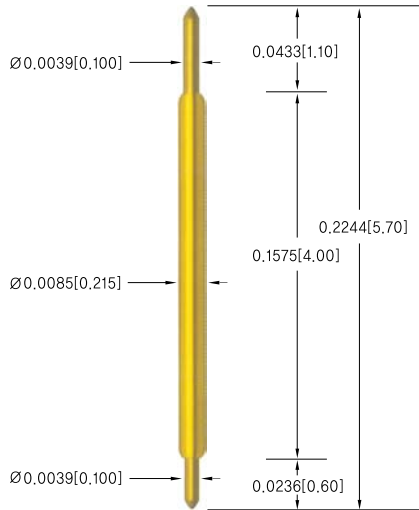


▪ Mechanical Spec.

Spring Force : .38oz (10.8g) @ .0256 (0.65mm)
 Recommend travel : .0256 (0.65mm)
 Full travel : .0394 (1.00mm)
 Material : Plunger - Hardened BeCu / Au plated
 Barrel - Phosphor bronze / Au plated
 Spring - Music wire / Au plated


▪ Electrical Spec.

Current Rating : 0.3A Continuous
 Probe Resistance : Less than 50mohm
 Self Inductance : 1.15nH Capacitance : 1.38pF
 Bandwidth : 17.17GHz Propagation Delay : 48.83ps

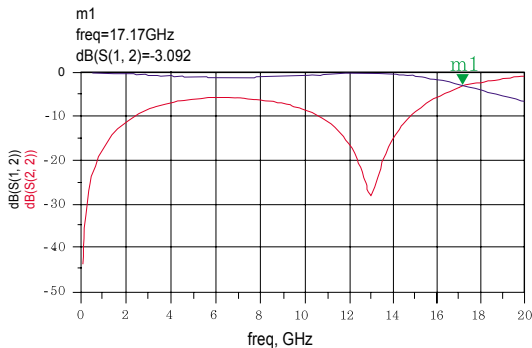

S-parameter

• DB440CC

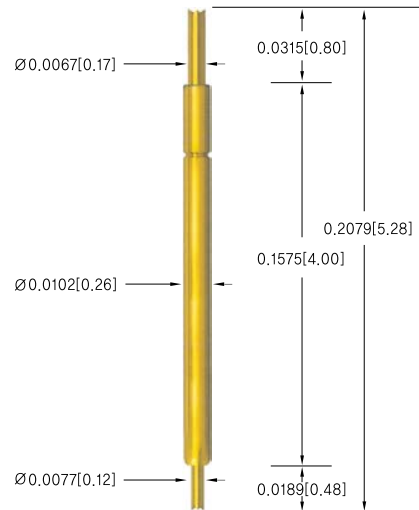


▪ Mechanical Spec.

Spring Force : .74oz (21.0g) @ .0197 (0.50mm)
 Recommended travel : .0197 (0.50mm)
 Full travel : .0236 (0.60mm)
 Material : Top Plunger - SK4 / Au plated
 Bottom Plunger - Hardened BeCu/Au plated
 Spring - Music wire / Au plated

▪ Electrical Spec.

Current Rating : 0.3A Continuous
 Probe Resistance : Less than 50mohm
 Self Inductance: 1.19nHC Capacitance : 1.29pF
 Bandwidth : 23.92GHzP Propagation Delay : 42.97ps

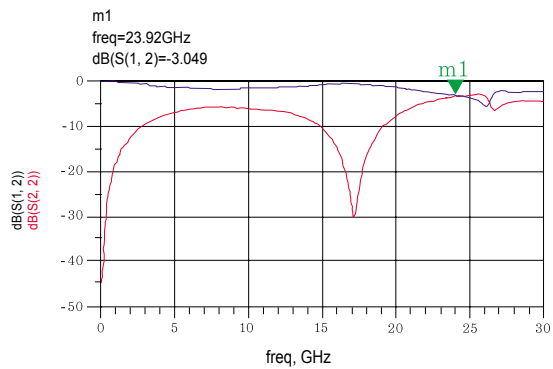

S-parameter

- All specifications subject to change without notice.
- All dimensions are in inches[mm].
- All spring forces in ounces[grams].