


**DB402CAM / DB215SA**

**• DB402CAM**

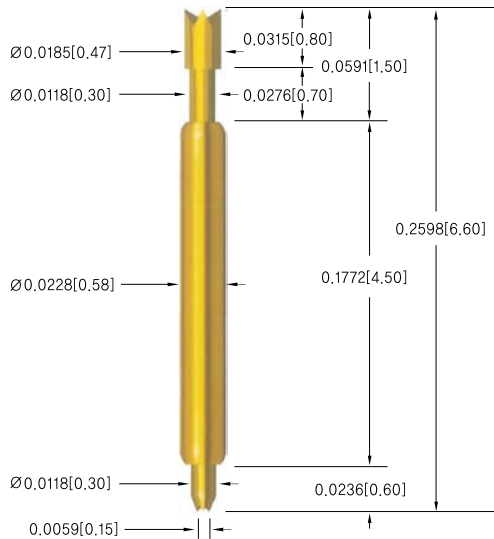


**▪ Mechanical Spec.**

Spring Force : 1.25oz (21.3g) @ .0354 (0.90mm)  
 Recommend travel : .0354 (0.90mm)  
 Full travel : .0512 (1.30mm)  
 Material : Plunger - Hardened BeCu / Au plated  
 Barrel - Phosphor bronze / Au plated  
 Spring - Music wire / Au plated


**▪ Electrical Spec.**

Current Rating : 1.0A Continuous  
 Leeno RF test fixture for S-parameter/TDR/ADS data  
 Self Inductance : 1.08nH      Capacitance : 0.73pF  
 Bandwidth : 24.92GHz      Propagation Delay : 59.42ps

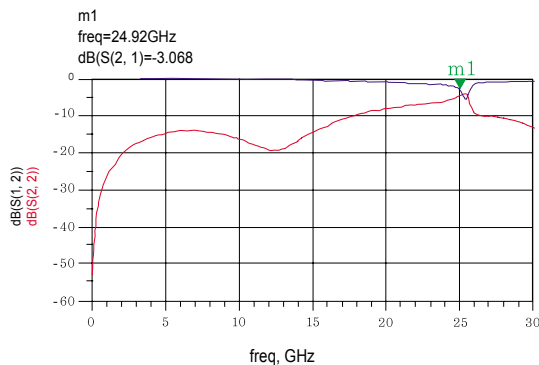

S-parameter

**• DB215SA**

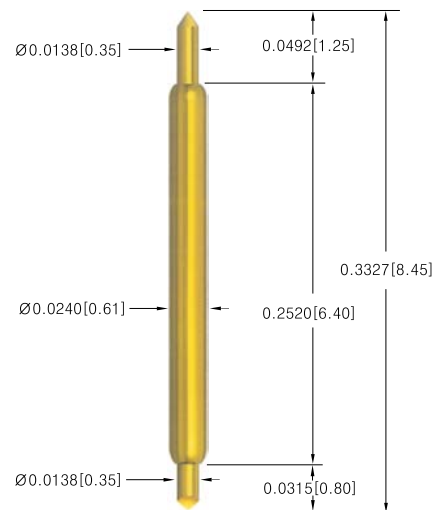


**▪ Mechanical Spec.**

Spring Force : .76oz (21.6g) @ .0295 (0.75mm)  
 Recommended travel : .0295 (0.75mm)  
 Full travel : .0512 (1.30mm)  
 Material : Plunger - Hardened BeCu / Au plated  
 Barrel - Phosphor bronze / Au plated  
 Spring - Music wire / Au plated

**▪ Electrical Spec.**

Current Rating : 1.0A Continuous  
 Leeno RF test fixture for S-parameter/TDR/ADS data  
 Self Inductance: 1.36nH      Capacitance : 0.77pF  
 Bandwidth : 36.55GHz      Propagation Delay : 84.96ps

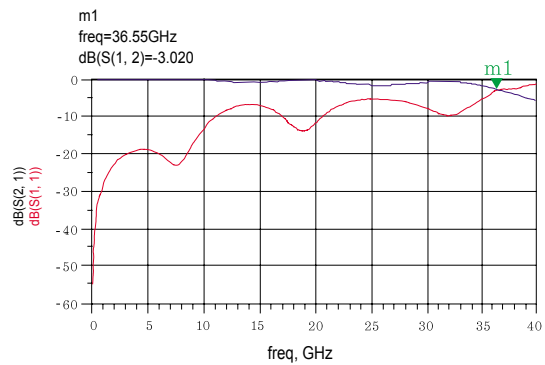

S-parameter

- All specifications subject to change without notice.
- All dimensions are in inches[mm].
- All spring forces in ounces[grams].